


ERGOPLUS 600

M I G R A N G E

TECHNICAL DATA

Voltage class	L
Cooling	Water cooled
Wire Ø mm	1.0 • 1.2 • 1.6 • 2.0 • 2.4
Duty cycle 100%	600A CO ₂ • 550A Mix
Max cooling liquid temp.	60° C
Min and max inlet liquid press.	1,5 ÷ 4
Min liquid flow rate	1,4 l/min (4 m lenght)



DECLARATION OF CONFORMITY

The undersigned company Trafimet - Via del Lavoro, 8 - 36020 Castegnero (VI) - Italy - declares that the product identified and described on this page complies with standard EN 60974-7 in accordance with the requirements contemplated by directive EEC 73/23 low voltage.



EN 60974-7

ERGOPLUS 600 m LINER ADAPTOR



EURO SPRING PINS	MB2300	3	GM0540	AR0052
	MB2301	4	GM0541	AR0052
	MB2302	5	GM0542	AR0052

trafimet®

your welding partner

www.trafimet.com



BX0024 • Standard **BX0068** Microswitch




ME0081 M6
ME0076 M8




ME0082 M6
ME0083 M8




ME0579
Ceramic • Standard




ME0074
Plastic Black



ME0079
Plastic White



ME0479
Plastic Brown




M8
MD0005-08 Ø 0.8
MD0005-10 Ø 1.0
MD0005-12 Ø 1.2 • Standard
MD0005-14 Ø 1.4
MD0005-16 Ø 1.6
MD0005-20 Ø 2.0
MD0005-24 Ø 2.4


ALUMINIUM
MD0005-60 Ø 1.0
MD0005-62 Ø 1.2
MD0005-66 Ø 1.6

Cu Cr Zr
MD0005-80 Ø 1.0
MD0005-82 Ø 1.2
MD0005-86 Ø 1.6


Triangular
MD1005-10 Ø 1.0
MD1005-12 Ø 1.2
MD1005-16 Ø 1.6
MD1005-80 Ø 1.0 CuCrZr
MD1005-82 Ø 1.2 CuCrZr
MD1005-86 Ø 1.6 CuCrZr

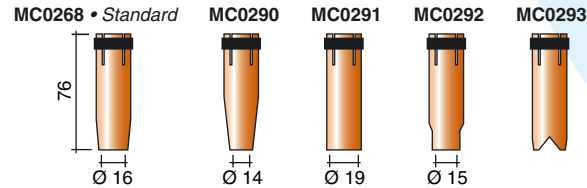

AR0052 Spring pins



	STEEL	TEFLON
Red - wire 1.01.2 -		
3	GM 0510	GM 0610
4	GM 0511	GM 0611
5	GM 0512	GM 0612
Yellow - wire 1.21.6 -		
3	GM 0540	GM 0760
4	GM 0541	GM 0761
5	GM 0542	GM 0762
Grey - wire 1.62.4 -		
3	GM 0574	
4	GM 0575	
5	GM 0576	

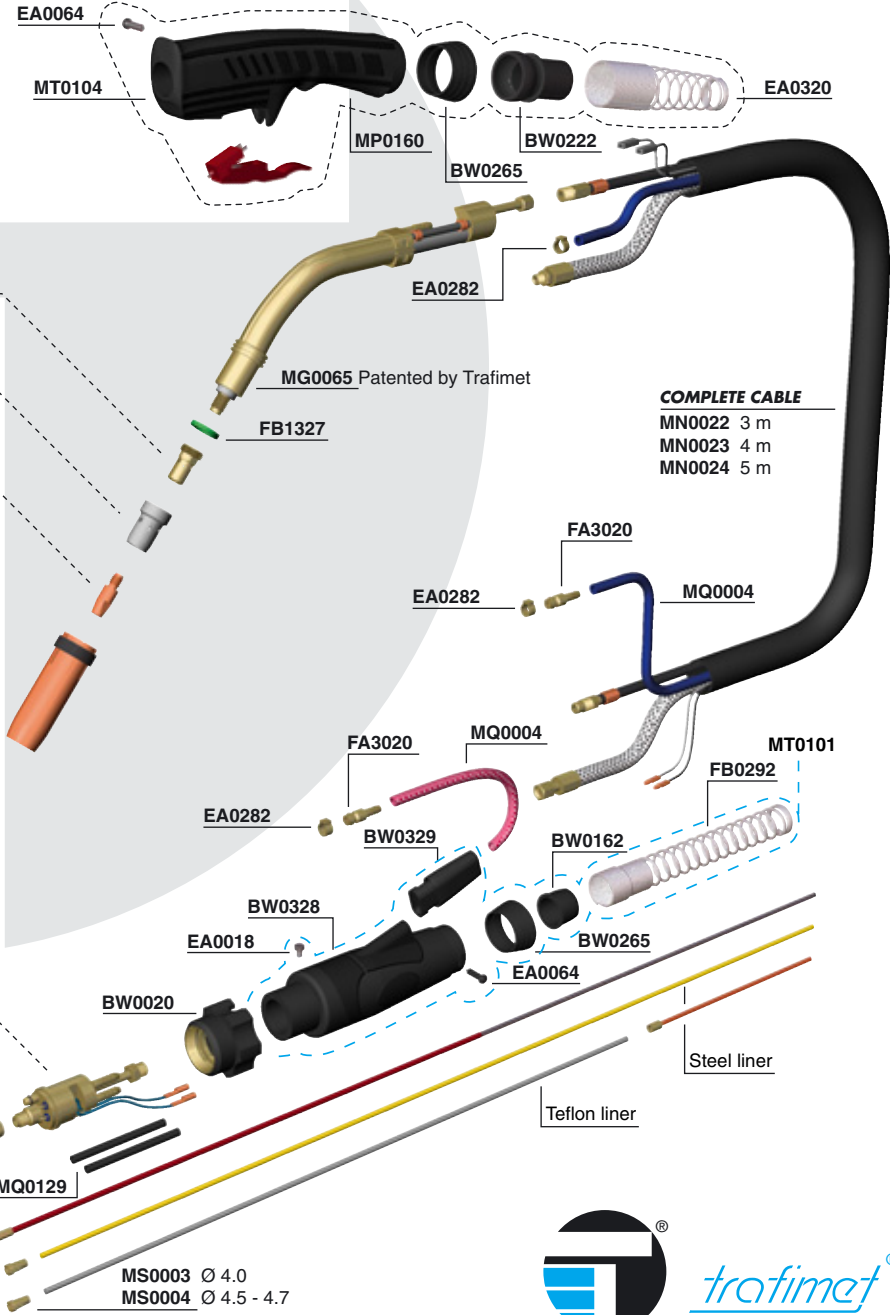

COMPLETE CABLE
MN0022 3 m
MN0023 4 m
MN0024 5 m

